

LED Floodlight with knuckle

NEXLEDS[®]
NEXLEDS LTD


LED Floodlight with knuckle



Features

1. cUL & DLC listed with LM79 & LM80;
2. Patented design, ultra-slim, elegant & distinctive appearance;
3. Premium quality SMD LEDs with high lumen output;
4. Quality integrated driver, high driver efficiency $\geq 87\%$, PF > 0.9;
5. Excellent heat dissipation by using high purity aluminum alloy;
6. Finish: bronze & black;
7. High waterproof rate IP65 for outdoor usage;
8. High uniformity on lamp direction, lamp can be adjustable to suitable position by angle indicate line;

Dimension

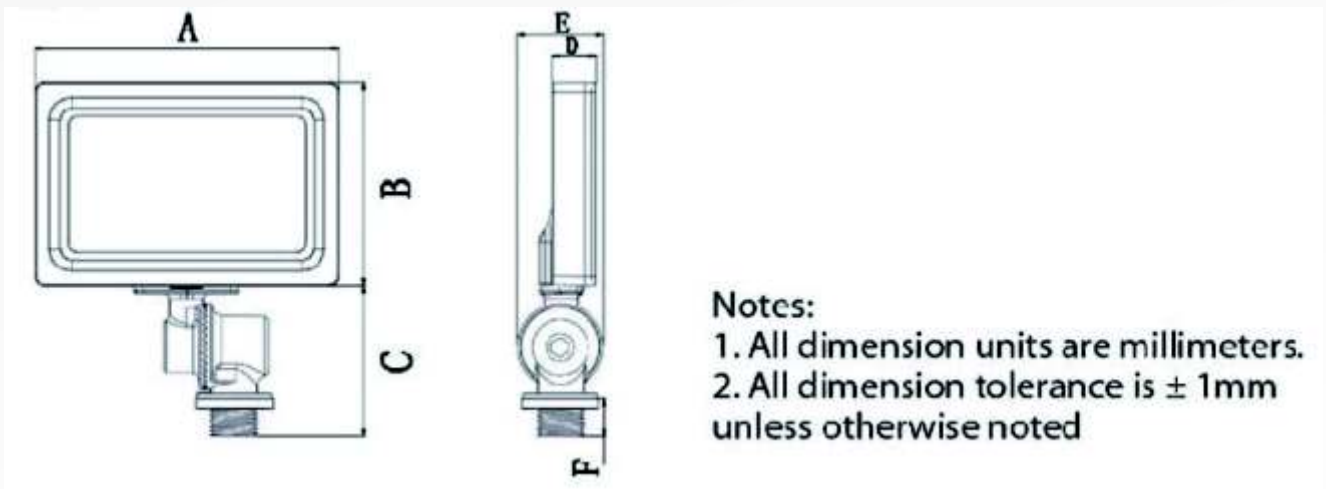

Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
NXSFL01-10W	135	90	66.8	19.5	38	16.5
NXSFL02-20W	190	130	66.8	23.5	38	16.5
NXSFL03-30W	240	165	66.8	29.5	38	16.5
NXSFL05-50W	300	210	66.8	36	38	16.5

Model	NXSFL01-10W	NXSFL02-20W	N w L03-30W	NXSFL05-50W
Working Voltage	AC120V	AC120V	AC100-277V	AC100-277V XSF
Luminous Efficiency	110lm/	110lm/w	120lm/w	120lm/w
Certificate	DLC, cUL, FCC			
Housing	Die-cast aluminum			
Finish	Bronze/Black		Temperature	
Color Rendering Index	Ra > 80			
Power Factor	PF > 0.9			
Beam Angle	110 Degree			
Optical system	Toughened glass + Reflector			
Environment	Suitable for Wet locations			
Life-span(hrs)	≥ 50000H			
Operating Temperature	-20 °C ~ +40 °C			
Storage	-30 °C ~ +50 °C			

Applications

■ Widespreaduse in Family,School	■ Office,ShowingRoom,MeetingRoom
■ CommercialBuildingTower,Hotel,Restaurant	■ FactoryProductionLine, Warehouse
■ Pathwaylighting,Streetlighting	■ Subwaystation,bus and train

