

SPECIFICATION

NEXLEDS®

NEXLEDS LTD



3000K-4000K-5000K

Changeable

30W-20W-15W

Changeable

50W-40W-30W

Changeable

100W-80W-60W

Changeable



VIDEO

LED Flood Light

NX-SFLL13-30W-H-MV-TCP(XX)

NX-SFLL13-50W-H-MV-TCP(XX)

NX-SFLL13-100W-H-MV-TCP(XX)

Specification

| | | | |
|------------------------|------------------------------------|----------------------------|-----------------------|
| Product Name : | LED FLOOD Light | | |
| Model NO. : | NX-SFLL13-30W-H-MV-TCP(XX) | NX-SFLL13-50W-H-MV-TCP(XX) | |
| | NX-SFLL13-100W-H-MV-TCP(XX) | | |
| Specification : | AC120-347V; 50/60Hz; | | |
| | 30W-20W-15W | 50W-40W-30W | 100W-80W-60W |
| Working Temp : | -40~45(°C) | | |
| Power Factor : | 0.9 | | |
| CRI(ra) : | >80 | | |
| Color : | Bronze Color | | |
| Light Source : | SMD2835 | | |
| Lumen : | 130LM/W | | |
| Life Time : | 50000 hrs | | |
| Beam Angle : | 7H6V | | |
| Product Size(Knuckle): | 7.58*6.91*2.26inch | 8.99*8.58*2.42inch | 10.26*12.22*2.99 inch |
| IP : | IP65 | | |
| Application : | Highway , tunnel..etc | | |
| Warranty : | 5 years | | |
| Standard : | UL | | |
| Color Temp : | 3CCT(3000K-4000K-5000K) Changeable | | |

Feature:

Delicate appearance design

Unique rectangular octagonal design endows the **NX-SFLL13** floodlight a sense of strength. Requirements of different customers can be met through professional optical lens. Black and bronze housing are both good choices according to clients' choices.

Good heating dissipation

Using the material of ADC 12 aluminum alloy as radiator, good heat dissipation.

Low light attenuation

Within 1000hrs, the light decay is less than 3%, while the traditional attenuation of incandescent lamp is at least 30%. It can light up to 8 years and is equipped with a 5-year warranty.

High waterproof rate

Using structural waterproofing, the **NX-SFLL13** floodlight has a high waterproof rate of IP65 and is suitable for outdoor use.

High consistency on lamp direction

Precise scale on the bracket ensures consistent mounting angle.

User-friendly design, high installation efficiency, a variety of brackets for choice.


The bracket can be switched at will.



Brackets Description:


**30W-20W-15W
50W-40W-30W**

The two supports can be interchanged

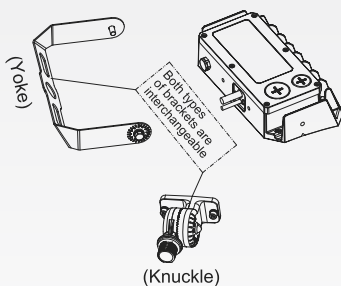


100W-80W-60W

Four kinds of supports can be interchanged

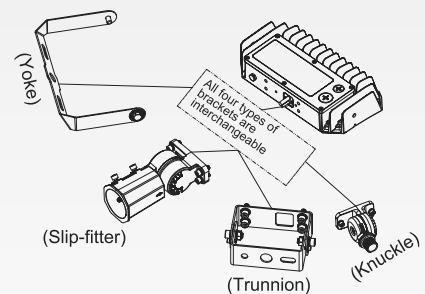


CCT & Wattage selectable:

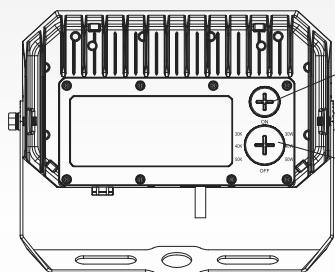


Photocell or no have

Open the plug with a flat-blade screwdriver and turn the switch to the desired position:
The switch on the left indicates the gear of the color temperature;
The switch in the middle indicates the opening or closing of the photo control sensor;
The switch on the right indicates the gear of the power.

Dimension:

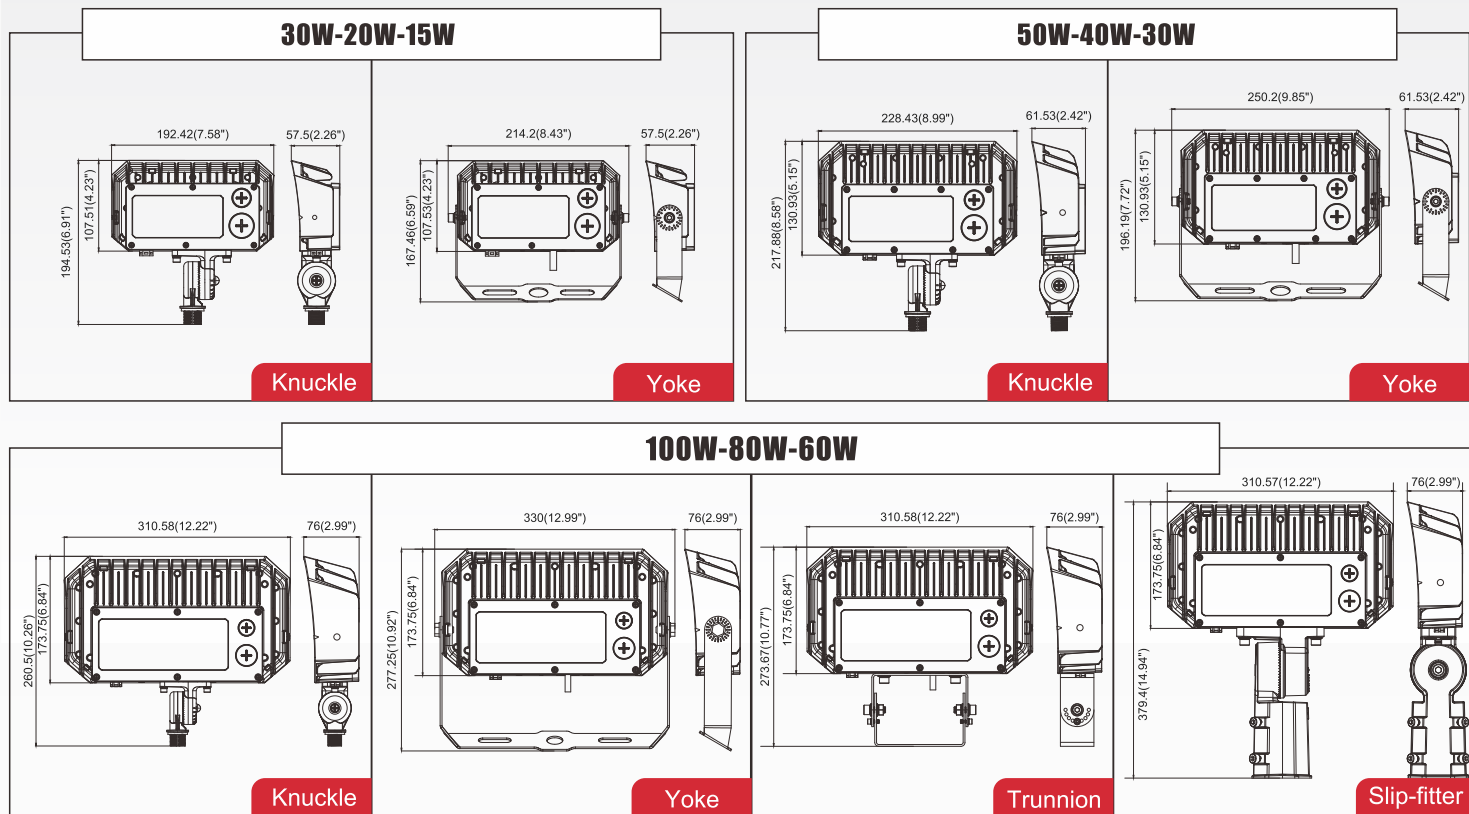

Application:

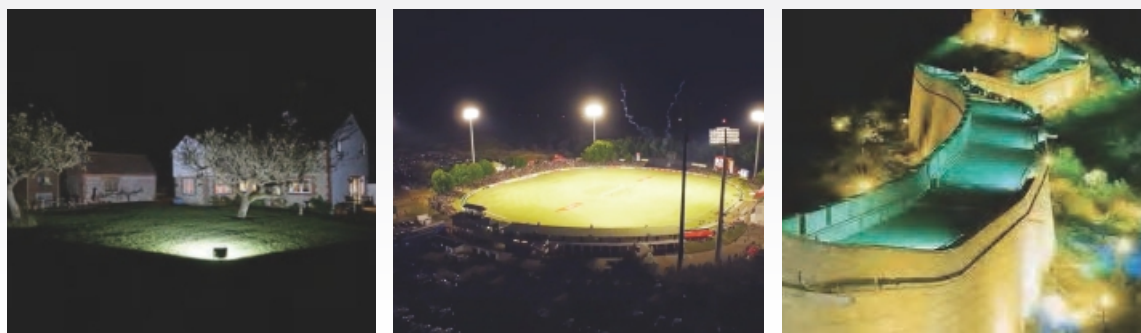

Note:

1. Only persons qualified for electrical work should carry out the electrical work;
2. Please cut off the power supply in any abnormal situation;
3. Please clean the floodlight shell termly;
4. Please do not wipe with water or caustic solution;
5. Be sure to ground the fixture;
6. Be careful when using and storing;
7. Avoid high pressure.