

SPECIFICATION




NEXLEDS[®]
NEXLEDS LTD

For 1x4 and 2x2 **15W-20W-25W-30W-40W**

For 2x4 **25W-30W-35W-40W-50W**

5 WATT CHANGEABLE
5 WATT CHANGEABLE
2700K-3000K-3500K-4000K-5000K

5 CCT CHANGEABLE

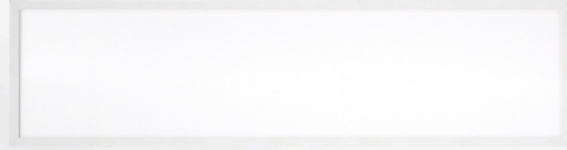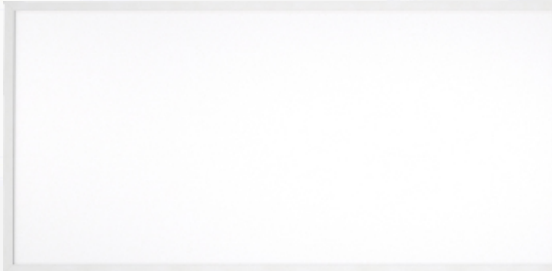

VIDEO



LED Back Light Panel

NXLPE1X4-40W-5CCT-DV / NXLPE2X2-40W-5CCT-DV
/ NXLPE2X4-50W-5CCT-DV

Specification:

PRODUCT NAME :	LED Backlit Panel Light		
MODEL NO. :	NXLPE2X4-50W-5CCT-DV	NXLPE1X4-40W-5CCT-DV	NXLPE2X2-40W-5CCT-DV
WATTAGE :	25W-30W-35W-40W-50W 278-370-463mA	15W-20W-25W-30W-40W 185-278-370mA	15W-20W-25W-30W-40W 185-278-370mA
SPECIFICATION :	120-347V; 50/60Hz;		
WORKING TEMP :	-20-45(°C)		
POWER FACTOR :	0.9		
CRI(RA) :	>80		
COLOR :	White Color		
LIGHT SOURCE :	2835 LED Chip		
LUMEN :	130 lm / W		
LIFE TIME :	50000 hrs		
BEAM ANGLE :	120°		
PRODUCT SIZE :	1212*603mm	1212*302mm	603*603mm
IP :	IP40		
APPLICATION :	Home, Shop, Hotel, Office...etc		
WARRANTY :	5 years		
STANDARD :	UL, DLC, FCC		
COLOR TEMP :	2700K-3000K-3500K-4000K-5000K Selectable		



www.nexleds.ca




Email: sales@nexleds.ca

NEXLEDS[®]

NEXLEDS LTD

Installation:


① Carefully unpack the fixture from its packaging and check contents.

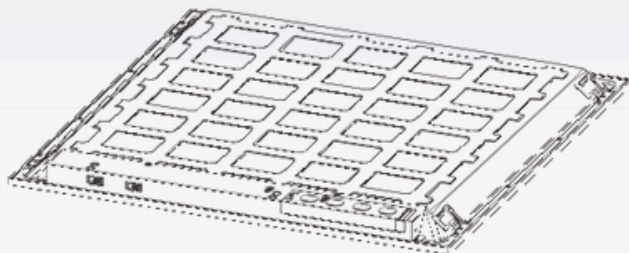


② Turn off power at circuit breaker.



③ Locate all four earthquake clips on the back of luminaire. Twist each tab away from luminaire testing them on the T-bar.

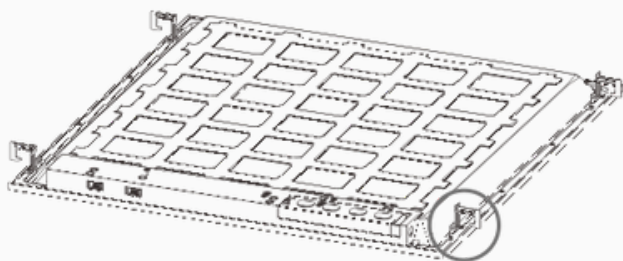


④ Rest the Luminaire on the T-Bar of the ceiling suspension system in the desired location.

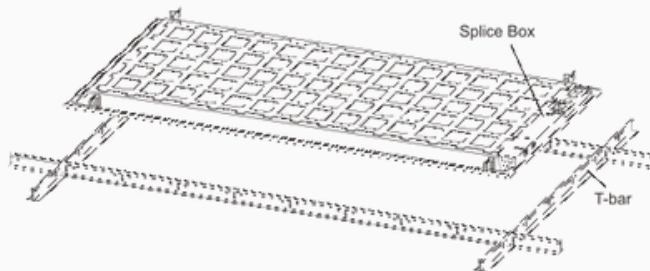


⑤ Open the connection box and connect the incoming electrical wires to the set of power wires black to black(Live), white to white(Neutral) and green to green(ground). See wiring diagram 1;

⑥ For 1-10V dimming, make sure connect the same wire color . See wiring diagram 2

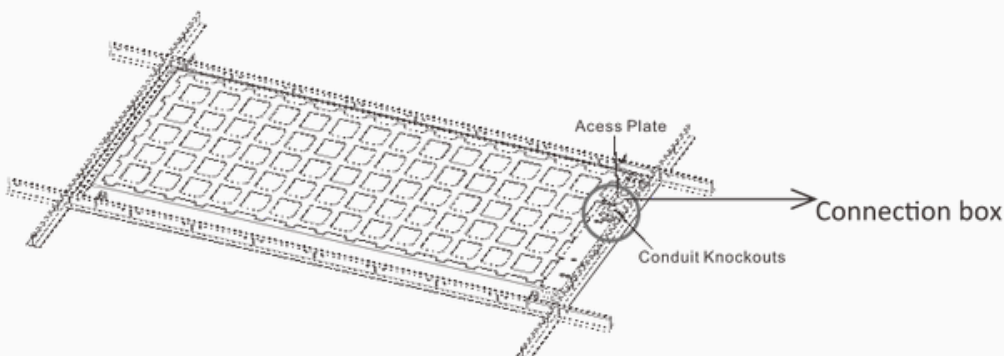

Installation:

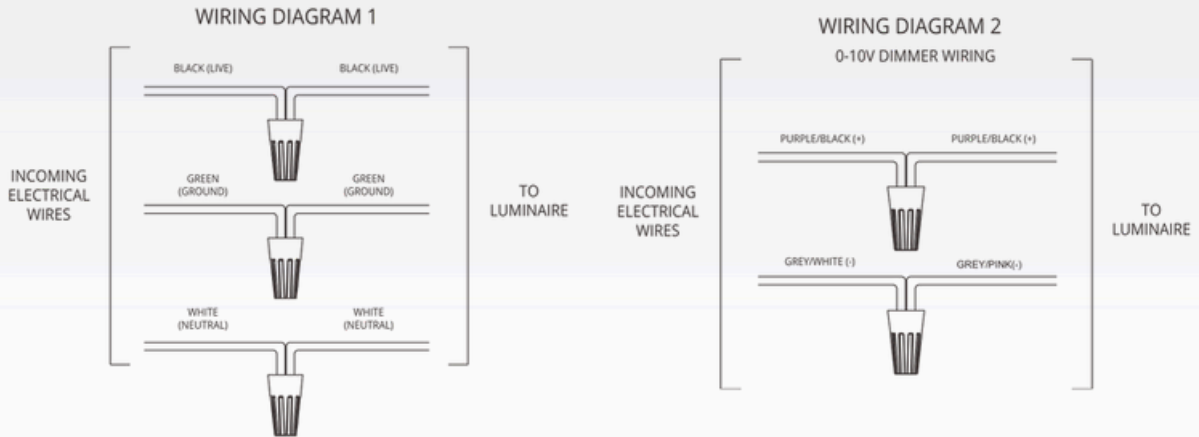

- ⑦ check the wiring, make sure everything is correct. Recover the connect on box.
- ⑧ Select the CCT and wattage you need. ⑨ Turn on power to light up the luminaire.

2x2: 15W-20W-25W-30W-40W, 2700K-3000K-3500K-4000K-5000K
1x4: 15W-20W-25W-30W-40W, 2700K-3000K-3500K-4000K-5000K



2x4: 25W-30W-35W-40W-50W, 2700K-3000K-3500K-4000K-5000K

Dimension(Unit:mm)

