

SPECIFICATION


NEXLEDS®

NEXLEDS LTD

5CCT CHANGEABLE

Flip bottom switch to change 5 CCT

2700K 3000K 3500K 4000K 5000K

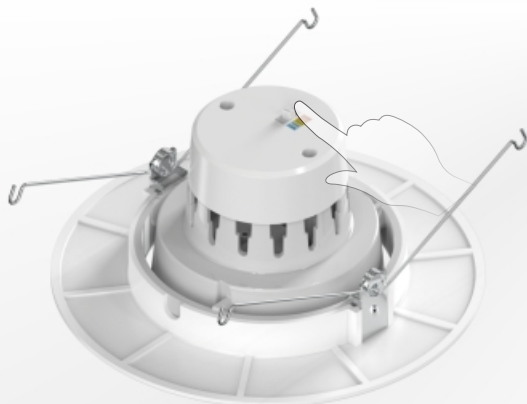

Damp Location



Intertek



VIDEO

5CCT LED Gimbal Downlight

NX-GDL6-15W-5CCT 15W


Specification

Product Name :	5CCT LED Gimbal Downlight
Model No. :	NX-GDL6-15W-5CCT
Specification :	AC120V; 50/60Hz; 15W
Working Temp :	-20~25(°C)
Power Factor :	>0.9
CRI(ra) :	>90
Color :	White Color
Material :	Aluminum+PC
Light Source :	COB Chip
Lumen :	900~1050 lm
Life Time :	30000 hrs
Beam Angle :	60°
Adjustable Angle :	45°
Product Size :	Φ7.48*3.46 inch (190*88mm)
Cut Out :	6 inch
Environment:	Dry Location; Damp Location
Application :	Bedroom, Kitchen, Bathroom, Living room, Shop, Hotel
Warranty :	5 years
Standard :	ETL
Color Temp :	2700K-3000K-3500K-4000K-5000K

Feature:


- Easy installation
- Using high-brightness LED chip, energy saving and environmental protection, stable lighting, long service life
- Optical grade lampshade, good light, anti-aging, not easy to damage
- High thermal conductivity aluminum alloy shell, good heat dissipation, vacuum dust-free spraying, anti-corrosion, no peeling
- Strict waterproof treatment technology, in line with international waterproof and dustproof standards
- Radiation protection design, will not affect the lighting effect due to weather
- Charming appearance and fashionable

Dimension:

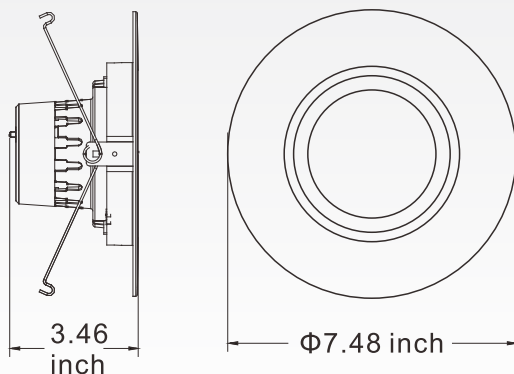


Instruction:


EASY INSTALLATION 1
(EITE EZ CONNECT HOUSING)

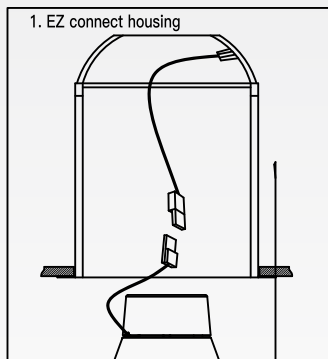


2. Connect the terminals

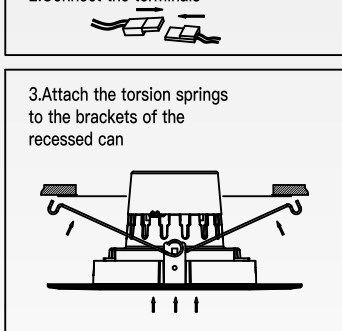


4. Inerst the LED Retrofit Kit into the recessed housing unit




3. Attach the torsion springs to the brackets of the recessed can

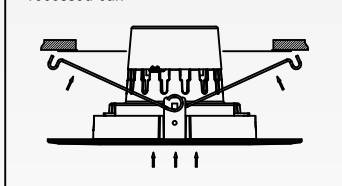


EASY INSTALLATION 2
(WITH STANDARD SOCKET HOUSING)

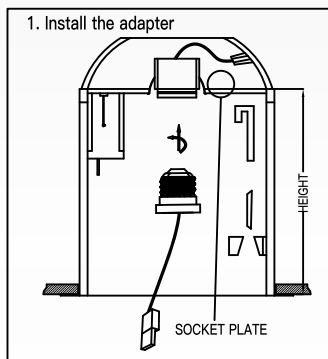

2. Connect the terminals

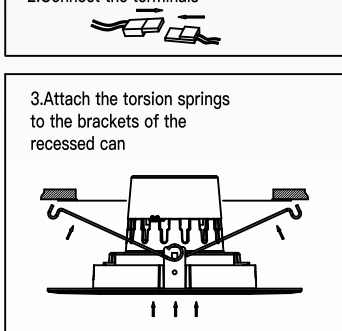

4. Inerst the LED Retrofit Kit into the recessed housing unit



3. Attach the torsion springs to the brackets of the recessed can

