

# SPECIFICATION

# NEXLEDS®

NEXLEDS LTD



**5 CCT**  
Changeable

VIDEO



25W:  
35W:  
45W:

2700K	3000K	3500K	4000K	5000K
2280 LM	2351 LM	2436 LM	2464 LM	2492 LM
3204 LM	3312 LM	3453 LM	3510 LM	3500 LM
4048 LM	4313 LM	4438 LM	4486 LM	4460 LM

## 6" Split Deep Regress Commercial Downlight

**NX-CDL-E2T6-45W-5C-DV**

### Specification

PRODUCT NAME :	6" Split Deep Regress Commercial Downlight
MODEL NO. :	NX-CDL-E2T6-45W-5C-DV
SPECIFICATION :	TYPE IC; AC120-347V; 50/60Hz; 25W-35W-45W
WORKING TEMP :	-4(°F)~+122(°F)
POWER FACTOR :	>0.90
CRI(RA) :	>90
COLOR :	Silver Color
LIGHT SOURCE :	SMD2835 Chip
LUMEN :	4486lm
LIFE TIME :	50000 hrs
BEAM ANGLE :	50°
PRODUCT SIZE :	D(8.07inch)*H(5.62 inch)
CUT OUT SIZE :	6.3 inch
IP :	Suitable for wet location
APPLICATION :	School, Shopping Center, Hotel
WARRANTY :	5 years
STANDARD :	ETL
DIMMABLE :	0-10V Dimming
COLOR TEMP :	<b>2700K-3000K-3500K-4000K-5000K</b> Changeable



www.nexleds.ca



Email: sales@nexleds.ca

# NEXLEDS®

NEXLEDS LTD

# SPECIFICATION

# NEXLEDS®

NEXLEDS LTD

## Feature:



- Spun aluminum reflector integrate with haze finish and white trim ring with shadow free.
- Durable tension clips, allow for fast and easy flush installation.
- 0-10V dimmable.
- Available in 3 wattages and 5 CCT tunable.
- LED split deep regress commercial downlight series are available in 3 different light engine. Each light engine could fitting 6" , 8" , 10" round trims.
- The innovative separable design of junction box and trim makes it more flexible. One engine allows for seamless integration of multiple trim sizes with easy and tool-free installation.
- Easy-fit installation comes from the adjustable butterfly clips. It is designed for recessed application.
- It is suitable for commercial and public places and elegantly decorates the ambience, such as shopping mall, hospital, airport, hotel lobby etc.



Selectable CCT & Selectable Wattage

The innovative separable design of junction box and trim makes it more flexible.

Easy-fit installation comes from the adjustable butterfly clips.

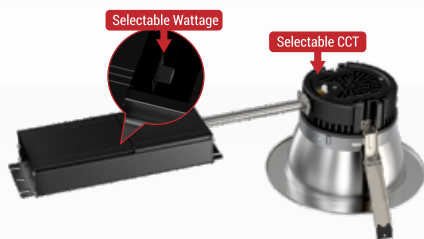

## Dimension:

	6" Light Engine (15W-20W-25W)	8" Light Engine (25W-35W-45W)	10" Light Engine (45W-55W-65W)	Hole Cutout
6" Round Trim	<p>8.07(205mm) 4.69(119.2mm) 9.02(229mm) 3.41(86.5mm) 5.02(127.7mm) 3.35(85mm) 1.58(40.22mm)</p>	<p>8.07(205mm) 4.69(119.2mm) 9.02(229mm) 3.41(86.5mm) 5.67(142.7mm) 3.74(95mm) 1.58(40.22mm)</p>	<p>8.07(205mm) 4.69(119.2mm) 9.02(229mm) 3.41(86.5mm) 7.1(177.7mm) 3.74(95mm) 1.58(40.22mm)</p>	<p>Φ6 19/64" (160mm)</p>
8" Round Trim	<p>10.03(255mm) 4.69(119.2mm) 9.02(229mm) 3.41(86.5mm) 5.42(137.7mm) 3.35(85mm) 1.58(40.22mm)</p>	<p>10.03(255mm) 4.69(119.2mm) 9.02(229mm) 3.41(86.5mm) 6.01(152.7mm) 3.74(95mm) 1.58(40.22mm)</p>	<p>10.03(255mm) 4.69(119.2mm) 9.02(229mm) 3.41(86.5mm) 7.97(187.7mm) 3.74(95mm) 1.58(40.22mm)</p>	<p>Φ8 5/64" (205mm)</p>
10" Round Trim	<p>11.42(290mm) 4.69(119.2mm) 9.02(229mm) 3.41(86.5mm) 5.42(137.7mm) 3.35(85mm) 1.58(40.22mm)</p>	<p>11.42(290mm) 4.69(119.2mm) 9.02(229mm) 3.41(86.5mm) 6.01(152.7mm) 3.74(95mm) 1.58(40.22mm)</p>	<p>11.42(290mm) 4.69(119.2mm) 9.02(229mm) 3.41(86.5mm) 7.39(187.7mm) 3.74(95mm) 1.58(40.22mm)</p>	<p>Φ8 31/32" (228mm)</p>



www.nexleds.ca



Email: sales@nexleds.ca

# NEXLEDS®

NEXLEDS LTD