

# SPECIFICATION

# NEXLEDS®

NEXLEDS LTD




**PATENTED  
DESIGN**



**5 CCT**  
Changeable

VIDEO

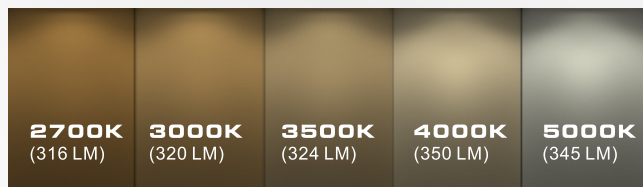

## 2" Floating Gimbal Downlight

**NX-FGDL2-5W-WH**

**NX-FGDL2-5W-BK**

### Specification

PRODUCT NAME :	2" Floating Gimbal Downlight
MODEL NO. :	NX-FGDL2-5W-WH / NX-FGDL2-5W-BK
SPECIFICATION :	TYPE IC;AC120V; 50/60Hz; 5W
WORKING TEMP :	-4(°F)~+122(°F)
POWER FACTOR :	>0.90; Flicker free
CRI(RA) :	>90
COLOR :	White Color / Black Color
LIGHT SOURCE :	COB Chip
LUMEN :	350lm
CABLE TYPE :	Fire rated 20 Mins FT4 cable
LIFE TIME :	50000 hrs
BEAM ANGLE :	36°
ADJUSTABLE ANGLE:	Tilt : 90° , Rotation : 350°
PRODUCT SIZE :	D(3.5 inch)*H(1.27 inch)
CUT OUT :	2.83 inch
IP :	Suitable for wet location
APPLICATION :	Home, Shop, Hotel
WARRANTY :	5 years
STANDARD :	ETL
DIMMABLE :	Triac Dimming
COLOR TEMP :	2700K-3000K-3500K-4000K-5000K Changleable

# SPECIFICATION

# NEXLEDS®

NEXLEDS LTD




**PATENTED  
DESIGN**



**5 CCT**  
Changeable

VIDEO

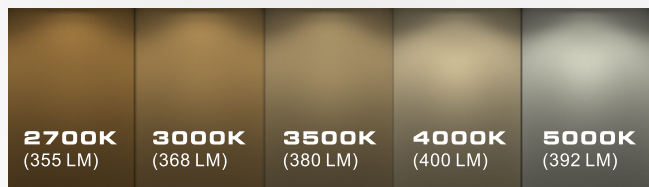

## 3" Floating Gimbal Downlight

**NX-FGDL3-6W-WH**

**NX-FGDL3-6W-BK**

### Specification

PRODUCT NAME :	3" Floating Gimbal Downlight
MODEL NO. :	NX-FGDL3-6W-WH / NX-FGDL3-6W-BK
SPECIFICATION :	TYPE IC;AC120V; 50/60Hz; 6W
WORKING TEMP :	-4(°F)~+122(°F)
POWER FACTOR :	>0.90; Flicker free
CRI(RA) :	>90
COLOR :	White Color / Black Color
LIGHT SOURCE :	COB Chip
LUMEN :	400lm
CABLE TYPE :	Fire rated 20 Mins FT4 cable
LIFE TIME :	50000 hrs
BEAM ANGLE :	36°
ADJUSTABLE ANGLE:	Tilt : 90° , Rotation : 350°
PRODUCT SIZE :	D(3.94 inch)*H(1.15 inch)
CUT OUT :	3.08 inch
IP :	Suitable for wet location
APPLICATION :	Home, Shop, Hotel
WARRANTY :	5 years
STANDARD :	ETL
DIMMABLE :	Triac Dimming
COLOR TEMP :	2700K-3000K-3500K-4000K-5000K Changleable

# SPECIFICATION

# NEXLEDS®

NEXLEDS LTD




**PATENTED  
DESIGN**



**5 CCT**  
Changeable

VIDEO

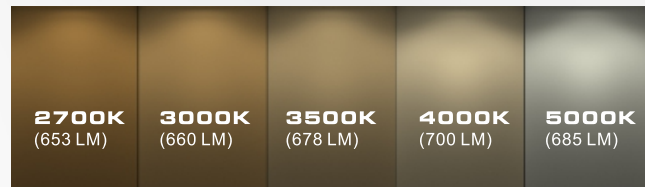

## 4" Floating Gimbal Downlight

**NX-FGDL4-9W-WH**

**NX-FGDL4-9W-BK**

### Specification

PRODUCT NAME :	4" Floating Gimbal Downlight
MODEL NO. :	NX-FGDL4-9W-WH / NX-FGDL4-9W-BK
SPECIFICATION :	TYPE IC;AC120V; 50/60Hz; 9W
WORKING TEMP :	-4(°F)~+122(°F)
POWER FACTOR :	>0.90; Flicker free
CRI(RA) :	>90
COLOR :	White Color / Black Color
LIGHT SOURCE :	COB Chip
LUMEN :	700lm
CABLE TYPE :	Fire rated 20 Mins FT4 cable
LIFE TIME :	50000 hrs
BEAM ANGLE :	36°
ADJUSTABLE ANGLE:	Tilt : 90° , Rotation : 350°
PRODUCT SIZE :	D(4.79 inch)*H(1.47 inch)
CUT OUT :	4.3 inch
IP :	Suitable for wet location
APPLICATION :	Home, Shop, Hotel
WARRANTY :	5 years
STANDARD :	ETL
DIMMABLE :	Triac Dimming
COLOR TEMP :	2700K-3000K-3500K-4000K-5000K Changleable

# SPECIFICATION

# NEXLEDS®

NEXLEDS LTD

## Feature:

- Aluminum die-cast body with adjustable gimbal
- Spring loaded retention arms allow for easy installation into ceilings
- Tilting gimbal light source for directional lighting
- Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.



## Dimension:

SIZE	DIMENSION		HOLE SIZE
2inch			
3inch			
4inch			


## Accessories:



J-Box driver



Connector



Hole cutout card